



SEAL•A•TRON

Shrink Packaging Equipment

SHRINK TECH SYSTEMS

Featuring
Our NEW
**ELECTRONIC
SEAL STROKE**



SEGMENT 1

AS-2024AC AUTOMATIC L-BAR


Standard Features:

- Electronic Seal Stroke with Variable Height Controls
- Digital PLC Controls
- 6" Color HMI Screen
- Variable Frequency Driven Motor Controls
- Positive Film Assist for Feeding Packages
- V-Grooved Conveyor Belts Reducing Belt Wear
- Safety Interlocks
- Proximity Sensor for Reliable Performance
- Package Staging
- Motorized Center Seal Adjustment
- Horizontal Photo Eye
- Auto Reverse for Tall Packages
- Easy Access Film Scrap Take Up
- Power Required:
220 VAC, Single Phase, 20Amps

Seal Bar Dimensions: **20"W x 24"L x 9"H**
Minimum Package: **2"W x 3"L x 1/4"H**
Maximum Package: **17"W x 20"L x 8"** (consult factory)
Maximum Film Roll: **26" Centerfold**



Easy Access Film Scrap Wind-up

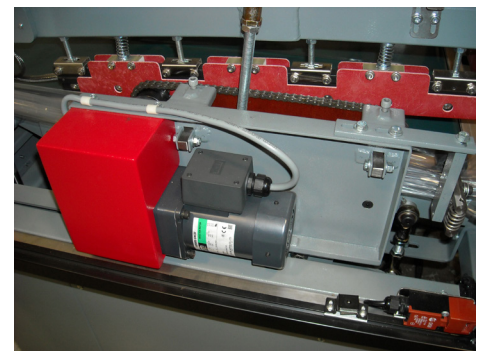

Positive Drive Film Feed (Feeds thin gauge films)

Seal-A-Tron Corporation™ • 3815 S.E. Naef Road. • Portland, OR 97267 • Phone (503) 652-5200

Visit us on the Internet at: <http://www.seal-a-tron.com>